
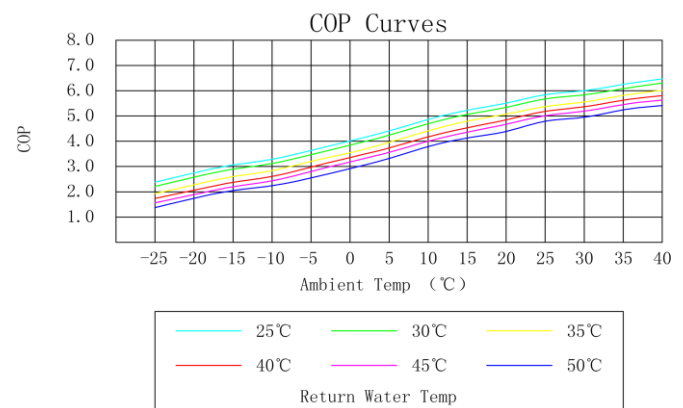


ULTRA SLIM HIGH EFFICIENCY HEAT PUMP

Inverter Monoblock		NE	EVXHC-10-1FS	EVXHC-20-1FS	EVXHC-22-1FS	EVXHC-30-3FS	EVXHC-383FS
Rated Heating Capacity (A20°/W45°)	KW		10 KW	20KW	22KW	30KW	38KW
Rated Cooling Capacity (A35°/W7°C)	KW		7.5KW	12.5KW	15KW	20KW	25KW
Power Consumption	KW		1 ~ 3.25KW	2 ~ 5.4KW	2.5 ~ 6.5KW	2.66 ~ 9.28KW	3.45 ~ 12.03KW
Heating Capacity I (A7°C/W45°C)	KW		8.45KW	14KW	16.8KW	22.5KW	28.1KW
Voltage (V)	V/Hz		220V-Inverter	220V-Inverter	220V-Inverter	380V-Inverter	380V-Inverter
Rated Currency/Max Currency	A		11.6A/14.8A	19.5A/24.5A	23.8A/29.5A	12.7A/16.6A	15.9A/21.5A
Rated output water temperature	°C		Heating:40 ~ 45°C/ Cooling:12 ~ 7°C				
Max output water temperature			60°C				
Rated water flow	m³/h		1.3	2.15	2.41	3.44	4.3
Refrigeration			R410A				
Rated of waterproof			IPX4				
Control mode			Microcomputer central processor(linear control)				
Compressor	From		Double-Rotor Type				
	Quantity		1	1	1	1	1
	Brand		Mitsubishi				
Unit	Net size	mm	1110*330*956	1100*330*1250	1100*330*1250	1210*535*1495	1210*535*1495
	Weight	Kg	90kg	135kg	138kg	155kg	165kg
	Nosie level(2m)	dB(A)	≤50	≤50	≤50	≤55	≤55
Fan	From		Brushless DC inverter motor				
Ambient temperature	°C		(-25°-43°C)				
Water pump build-in	/		√	√	√	\	\
Expansion tank build-in	/		√	√	√	\	\
Inletpipe diameter/Outlet pipe diameter			DN25	DN25	DN25	DN40	DN40
Using area	mp		60-100	150-200	170-220	170-220	170-220

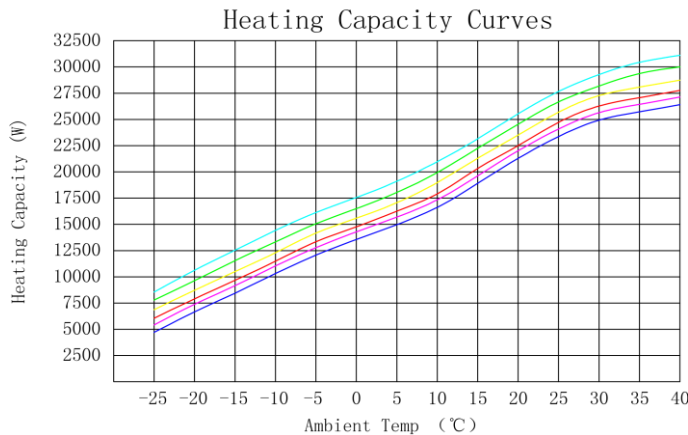

Heat pump type: **MITSUBISHI DC AiR INVERTER**, All in ONE Air to Water Heating Cooling 10/20/22/30kw

Heat pump functions: Radiator, FCU (fan coil unit), Floor Heating Cooling & Hot Water

Efficiency: COP 3.5-4.9 7-25C

Production certification: ISO 9001, ISO 14001

HP: CE, EMC, erP, CB, IEC, TUV, SGS

green power
departament

